


How to monitor multi-device in LAN?

Suitable for MJPG camera: FI8903W, FI8904W, FI8905W, FI8907W, FI8908W, FI8909W, FI8910W, FI8916W, FI8918W, FI8919W.


MJPG camera supports to monitor up to 9 IP cameras simultaneously. Please take the following steps as a reference to set multi-device in LAN.

Step 1: Log into camera click **For Administrator** → **Multi-Device Settings**. Click **The 2nd Device** and then click camera in **Device List in LAN**. Alias, Host and Http Port will be filled in automatically. You just need to enter the User and Password for the camera.

Click **Add** to add camera and then click **Submit** to save the settings.

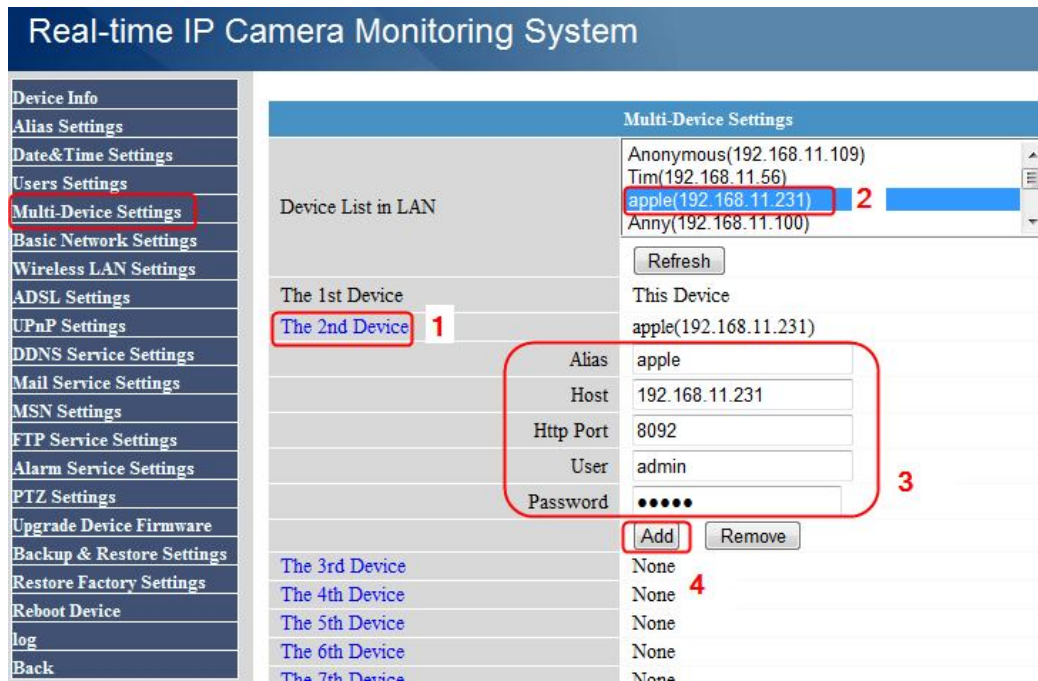

You can add more cameras in the same way. Eg: I add three cameras (apple, Tim, Anny) here.

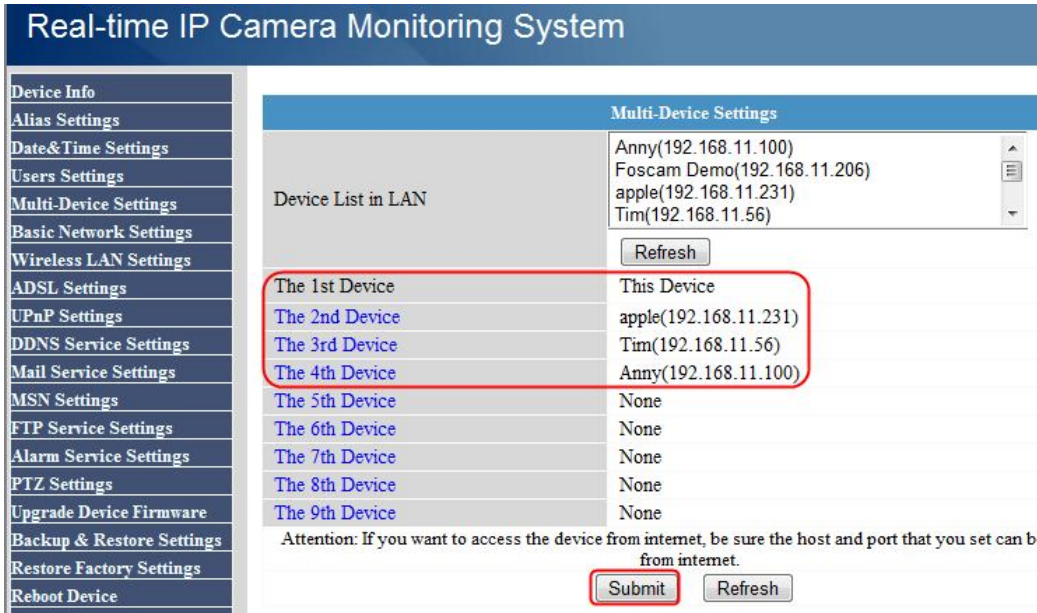

Step 2: Click **Back** to the real-time page. Go to **For Visitor** and then click four windows. You will see all the four cameras. The indicators on **Device Status** are green mean camera are added successfully.



Note:

1. Only on the device which you add other cameras can monitor all these cameras. If you want monitor on every camera, you need to do the same settings as above steps.

2. If indicator on Device Status is yellow, that means the parameters is incorrect. You may get error message like "Fail to connect to the device: Incorrect user". You can go back to Multi-Device to check the settings.
3. This is for local viewing. If you want monitor multi-device on internet, please refer to "How to monitor multi-device in WAN".